

Video & Pulse Delay Lines

page GPDFL/V_P_Delay

[Printable Adobe® pdf file](#)

VIDEO & PULSE DELAY LINES

Models AV-397 & 75-2A

- ▶ **Maximum Delay:** 2.075 microseconds \pm 3% variable in .025 microsecond steps from .025 to 2.075 microseconds
- ▶ **Distortion:** 2% maximum with .2 microsecond input pulse
- ▶ **Impedance :** 75 Ohms \pm 5%
- ▶ **Time Delay of Individual Line:** 1, .5, .2, .2, .1, .05, .025 microseconds
- ▶ **Working Voltage:** 100 volts maximum
- ▶ **Rise Time for Entire Line:** .06 microseconds maximum
- ▶ **Temperature Coefficient:** 50 parts/million/ $^{\circ}$ C
- ▶ **Frequency Response:** 3 dB down at 5 MHz for 2.075 microseconds delay
- ▶ **Attenuation:** 7% maximum for 2.075 microsecond delay.


AV-397

Size 2" x 2-1/2" x 5-1/2"



75-2A

Size 7-3/8" x 4-11/16" x 2-3/16"

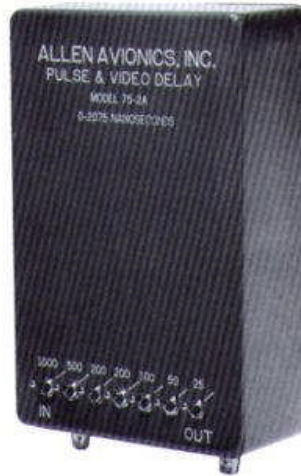

[Get More Information](#)

[Allen Avionics Home](#) | [Products](#) | [Cable & Home Theater](#) | [Video Capture & Playback](#) | [Video Hum and Noise Eliminators](#) | [Analog & Digital Delay Lines](#) | [Offset Marking Machine](#) | [Video Delay Lines](#) | [Microwave Filters](#) | [Video Filters](#) | [Brickwall Low Pass Filters](#) | [Filter Facts](#) | [Mechanical](#) | [General Purpose Delay Lines](#) | [Sales, Prices & Representatives](#) | [Glossary](#) | [About Hum](#) | [NTSC Video](#) | [Audio Ground Loop Isolation Transformers](#) | [Copyright](#) | [Feedback Page](#) | [What's New](#) | [Search](#) | [Site Map](#)

Allen Avionics, Inc.

255 East Second Street, Mineola, NY 11501

Phone: (516) 248-8080

Fax: (516) 747-6724

E-Mail: Info@AllenAvionics.com

